

LOCATION 1911 Flint Lw. CITY CAS.
"BETWEEN LANE ST. STREET & Bryson st. STREET


	SIZE	TYPE	LENGTH	INSTALLED	RETIRED	RENEWED
MAIN TO BLDG.	<u>3/4"</u>	<u>P.</u>	<u>56'</u>		<u>10-</u>	<u>9-57</u>
MAIN TO PROP. LINE	<u>"</u>	<u>"</u>	<u>4'</u>			
PROP. LINE TO BLDG.	<u>"</u>	<u>"</u>	<u>52'</u>			

ENTERS: SAME BRANCHED INTO:
TAP SIZE: 3/4" PRESSURE 60 PSI _____ INCHES W.C. LOCATION 182' from @ of
LANE ST.

PRESSURE TEST: @ 100 PSI FOR 1/4 HRS. BY D.F.
MAIN-SIZE 2" C.I. _____ BARE STEEL _____ COATED STEEL _____ PLASTIC ✓ YEAR INSTALLED 1997
DEPTH: 3 FT 0 IN LOCATION S. OF Flint st.

"A" P/S READING P TOTAL ANODES 1# — 17# — L.R. # —

REMARKS:

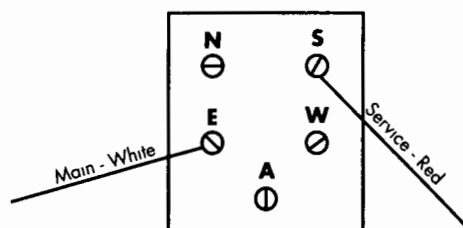

Test Station		
Reading & Location	Lead	Volts
P/S Pipeline Lead - Red New Service	<u>S</u>	
P/S Pipeline Lead - White Existing Main	<u>E</u>	

ENG. DEPT. USE ONLY