

LOCATION 822 & 822 1/2 & 828 Floyd Ln.CITY CantonBETWEEN 7 1/4

STREET &amp;

STREET

	SIZE	TYPE	# <u>828</u> LENGTH <u>822</u>	INSTALLED	RETIRED	RENEWED
MAIN TO BLDG.	<u>3/4</u>	<u>P</u>	<u>43'</u>	<u>81'</u>	<u>Relocated 10797</u>	
MAIN TO PROP. LINE	<u>3/4</u>	<u>P</u>	<u>0</u>	<u>4'</u>	<u>Retired 822 1/2</u>	
PROP. LINE TO BLDG.	<u>3/4</u>	<u>P</u>	<u>43'</u>			

ENTERS: 822BRANCHED INTO: 828 & 822 1/2TAP SIZE: 3/4 SerPRESSURE 60 PSI

INCHES W C

LOCATION

PRESSURE TEST @ 100 PSIFOR 44 HRSBY EPMAIN-SIZE 3/4

C.I. \_\_\_\_\_

BARE STEEL \_\_\_\_\_

COATED STEEL ☒

PLASTIC \_\_\_\_\_


YEAR INSTALLED 1960DEPTH: 1 FT 6 IN

LOCATION

"A" P/S READING 1.3TOTAL ANODES 1# 0 17# 0 L.R. # \_\_\_\_\_

REMARKS:

Tracer wire at Riser. Test point for EXT 3/4 G/W Ser.

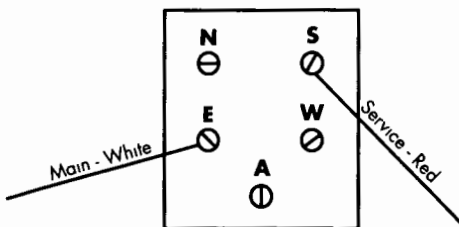

Test Station		
Reading & Location	Lead	Volts
P/S Pipeline Lead - Red New Service	<u>S</u>	<u>Riser Plate</u>
P/S Pipeline Lead - White Existing Main	<u>E</u>	

ENG. DEPT. USE ONLY